

**Mount Pleasant Operation
Monthly Environmental Monitoring Report**

August 2023

1. Introduction

The Mount Pleasant Operation (MPO) is located within Upper Hunter Valley of New South Wales, approximately three kilometres (km) north-west of Muswellbrook and approximately 50 km north-west of Singleton. The villages of Aberdeen and Kayuga are located 12 km north-northeast and 3 km north of the operations, respectively.

The purpose of this report is to provide a monthly update of monitoring data in accordance with the requirements of NSW Environmental Protection Licence (EPL) 20850, Section 66(6) of the *Protection of the Environment Operations Act 1997 (POEO Act)* and the MPO Development Approval (DA 92/97).

Table 1-1 – Mount Pleasant Operation

Name of Operation	Mount Pleasant Operation
Name of Licensee	MACH Energy Australia Pty Ltd
Environmental Protection Licence	20850
Project Approval	DA 92/97
Reporting Period Start Date	1 August 2023
Reporting Period End Date	31 August 2023
Date All Data Received	17 October 2023

Links to two key regulatory documents are provided here:

- [MACH Energy Environment Protection Licence EPL 20850; and](#)
- [Mount Pleasant Operation Development Application Approval DA 92/97.](#)

2. Monitoring Requirements

The MPO EPL 20850 specifically requires the monitoring of:

- 2 x Palas Fidas Air Quality Monitoring sites.
- Noise monitoring.
- Blast monitoring; and
- Meteorological monitoring.

Monitoring of sites not required by the EPL are conducted in accordance with *MPO Environmental Monitoring Program (EMP)* and Project Approval (DA 92/97).

All monitoring is undertaken by suitably qualified and experienced person(s).

The MPO Environmental Monitoring Network is shown in the following figures:

- **Figure 2-1** shows MPO attended noise monitoring locations and Noise Assessment Groups (NAGs).
- **Figure 2-2** shows the MPO Air Quality Monitoring network.
- **Figure 2-3** shows the MPO Blast Monitoring Locations.
- **Figure 2-4** shows the MPO Groundwater Monitoring network; and
- **Figure 2-5** shows the MPO Surface Water Monitoring network.

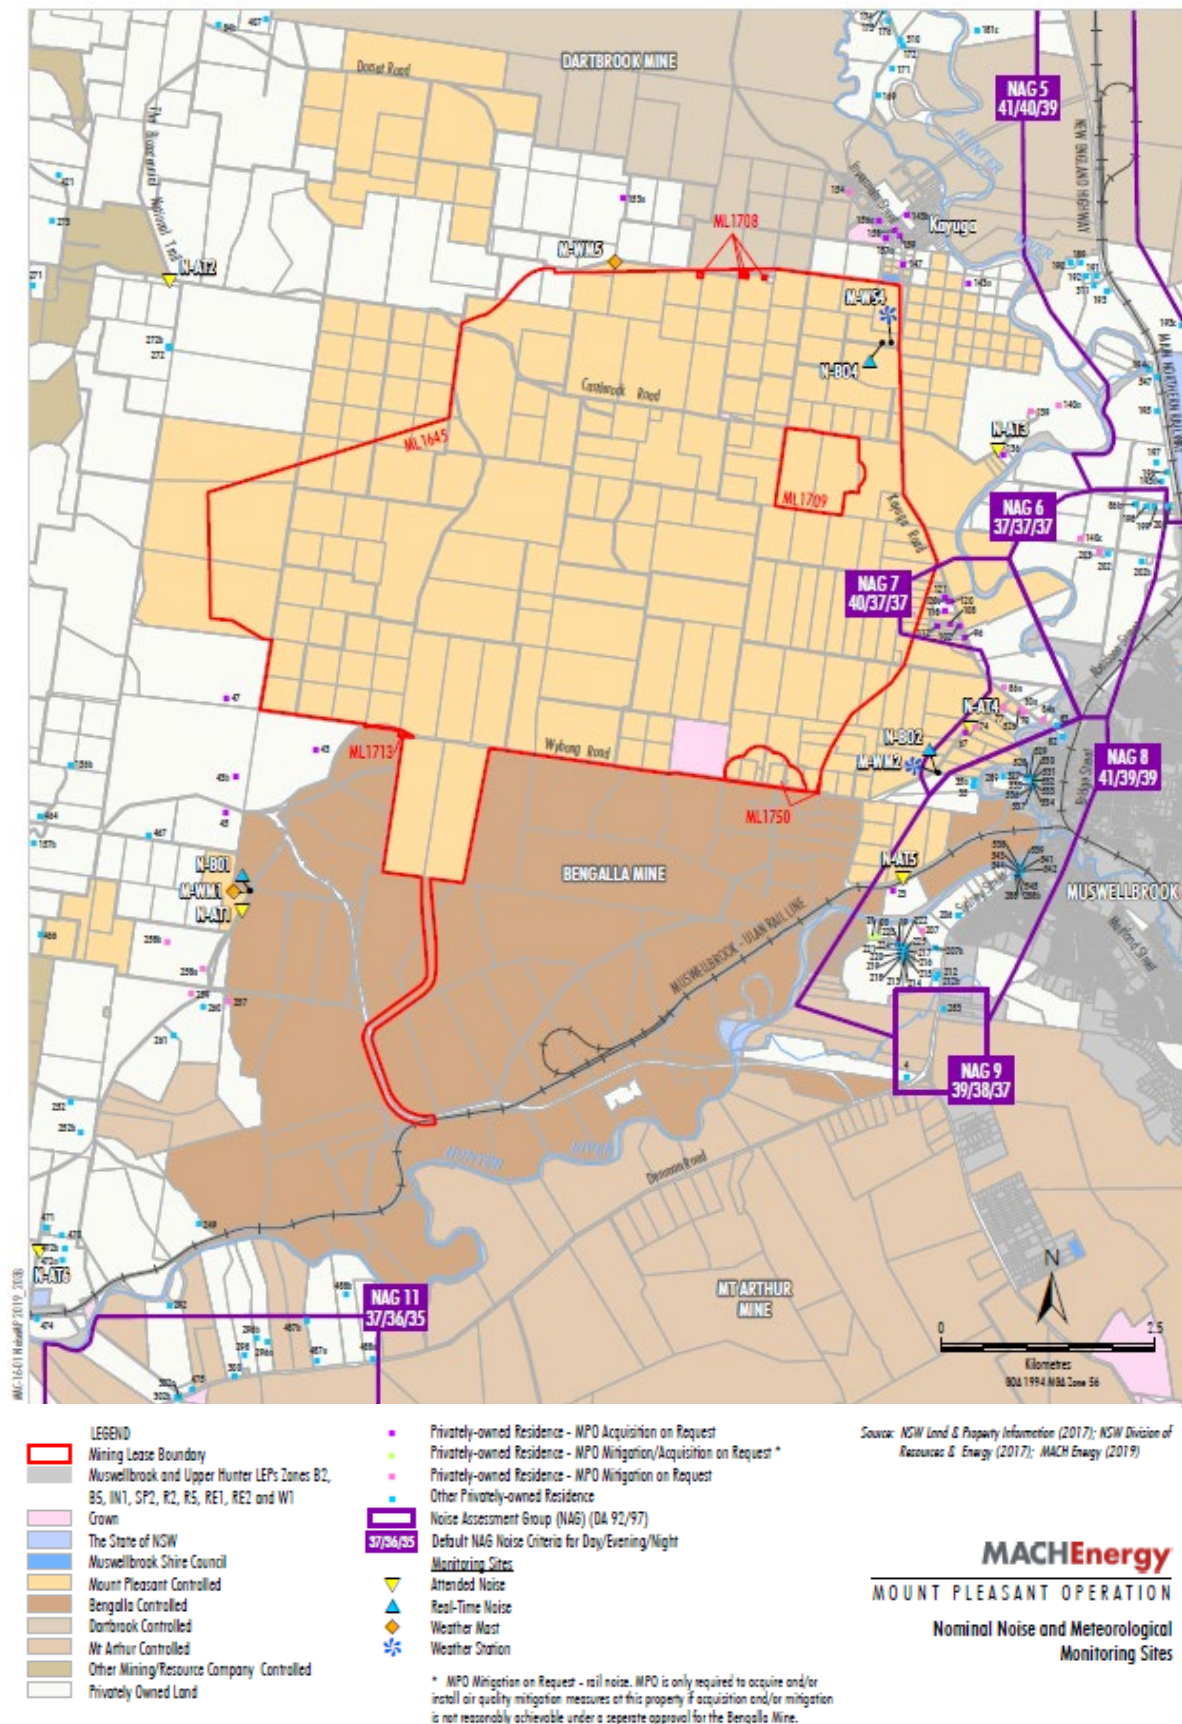


Figure 2-1 – MPO Attended Noise Monitoring Assessment Groups and Locations



Figure 2-2 – MPO Air Quality and Meteorological Monitoring Network

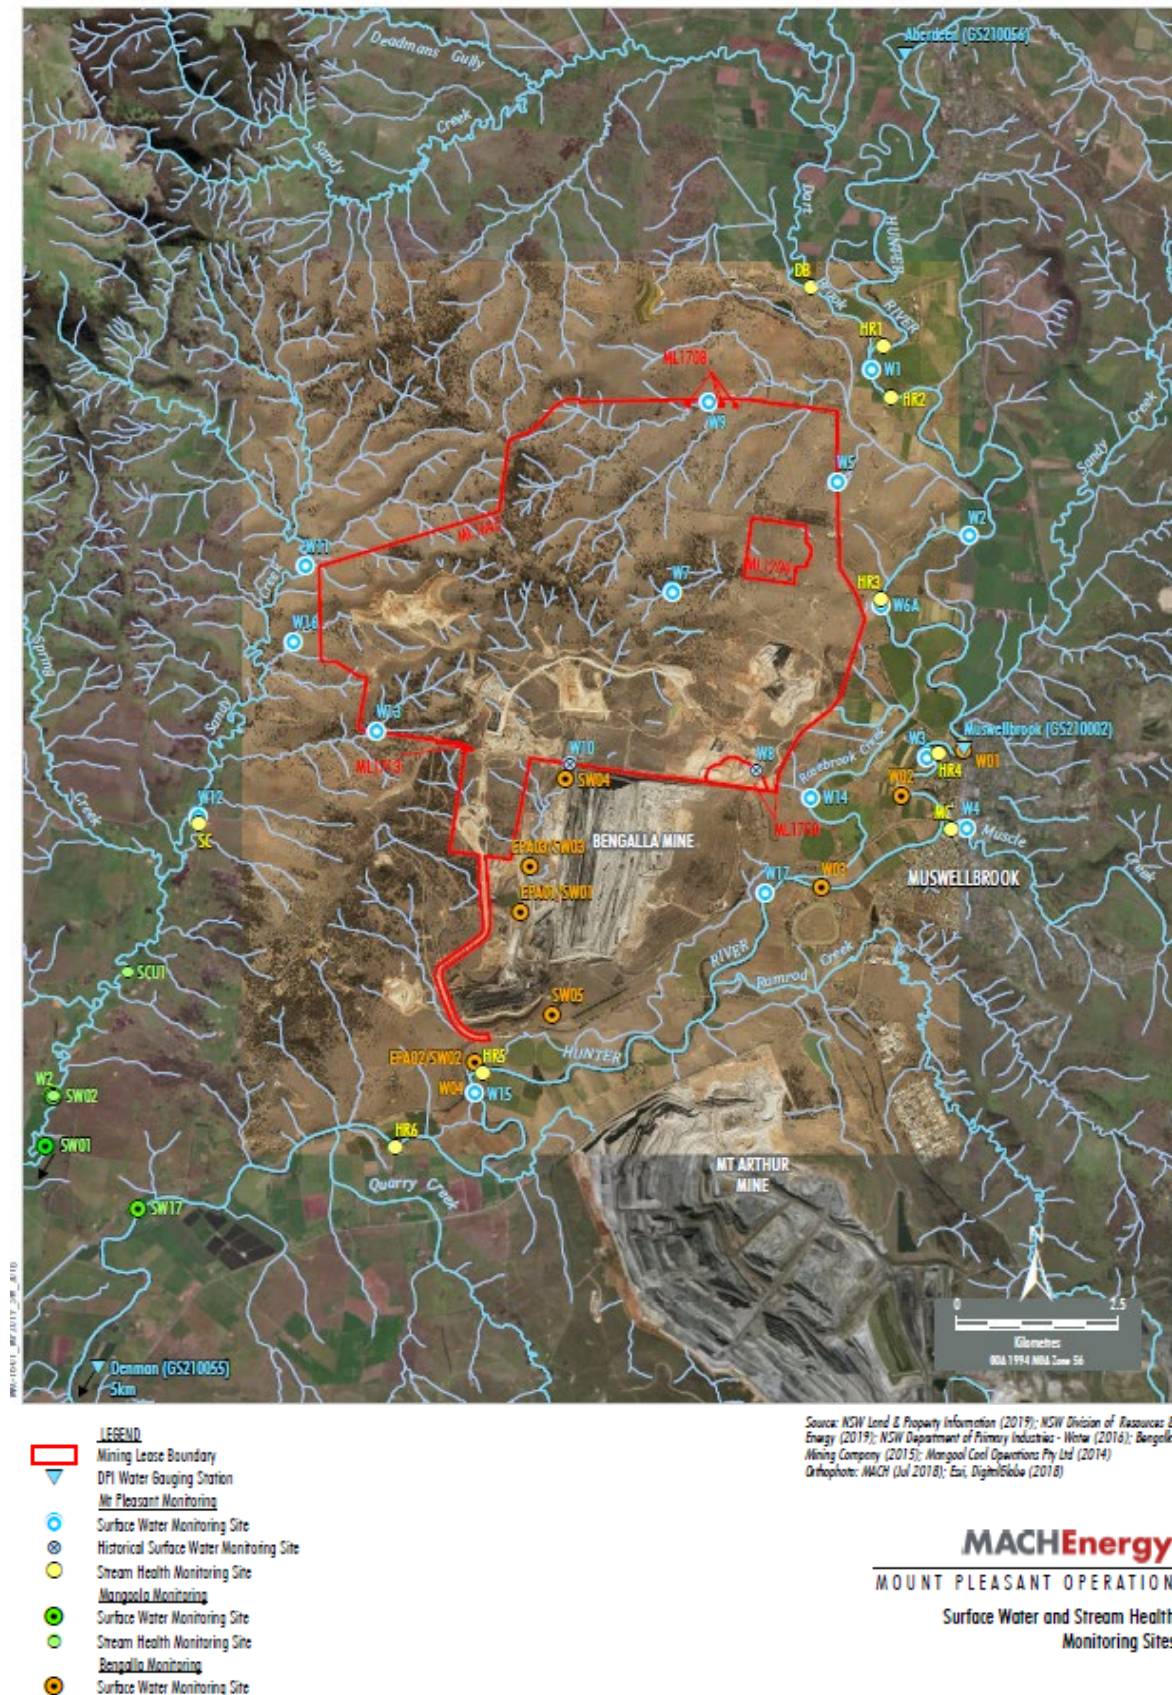


Figure 2-5 – MPO Surface Water Monitoring Network

3. Meteorological Monitoring

Weather data is measured continuously at the Kayuga Road (M-WS4) and the Wybong Road (M-WS2) meteorological stations. In addition to air quality parameters (PM₁₀ and PM_{2.5}), the weather stations measure wind speed and direction, temperature (at 2 metres (m) and 10m), temperature inversion (using the sigma theta method), solar radiation, relative humidity, rainfall and atmospheric pressure.

Most meteorological data was captured at M-WS2 (>99.8%) during August 2023 (the monitoring period) except for solar radiation (91.6%). Majority of this data was collected at M-WS4 (96.8%).

Throughout August 2023, there was 32.6mm and 48mm of rainfall recorded at M-WS2 and M-WS4, respectively.

4. Dust Depositional Monitoring

4.1 Methodology

Dust deposition was monitored according to the OEH's *Approved Methods for the Sampling and Analysis of Air Pollutants in New South Wales* (DECC 2007), which references *Australian Standard (AS)/New Zealand Standard (NZS) 3580.10.1:2016 Methods for Sampling and Analysis of Ambient Air: Determination of particulate matter – Deposited matter – Gravimetric Method*. The dust deposition monitoring network comprises of 13 dust deposition gauges (DDG). Details of the monitoring locations are shown in **Figure 2-2**.

DDG samples can be contaminated by a variety of means, notably by the presence of insects and bird droppings. Results for contaminated gauges were not included in the calculation of the annual averages as this would result in skewed or misleading results for the purpose of dust deposition assessment. The Australian Standard does not provide criteria for the determination of contamination of a DDG. AECOM determines a gauge sample to be contaminated only after reference to field observation sheets, historical monitoring location data, laboratory notes and results, prevailing atmospheric conditions, and feedback from field technicians. For example, a gauge sample with a statistically abnormally high insoluble solids result, a low ash residue result (indicating an elevated level of organic matter) and field notation that bird droppings or insects were present is likely to be considered contaminated.

4.2 Results

The dust deposition exposure period for gauges commenced on 24 July 2023. Sample collection was undertaken on 24 August 2023 by AECOM with sample analysis performed by ALS, a National Accreditation and Testing Authority (NATA) accredited laboratory. Results are summarised in **Table 4-1**. Annual rolling averages for August 2023 have been provided as an indication of performance between August 2022 – August 2023 and does not represent annual average results for 2023 as per Schedule 3, Condition 20 of DA 92/97.

Table 4-1: Dust Depositional Results – August 2023

Location	YTD Insoluble Solids (g/m ² .month)	Insoluble Solids Annual Rolling Average (g/m ² .month)
D1	1.9	1.9
D3	2.0	*
D4	1.1	1.0
D5a	2.9	2.7
D6	2.2	2.1
D7b	7.3	5.9
D8	3.6	3.4
D9a	4.3	3.9
D10	1.0	1.0
D11	2.7	2.5
D12	1.0	0.8
D13	1.3	1.3
D14	3.9	3.4
Criterion	-	4

Notes:

Results in **bold** indicate an elevated measurement of adopted assessment criteria.

* Insufficient monthly results to calculate annual average

Contaminated results, as described in Section 4.1, are not included in the 12-month rolling average. Site D7b is located within close proximity to the northern boundary of a neighbouring mining operation and thus can be influenced by this site. D7b will continue to be monitored, however will not be used to assess compliance or to represent residential receivers in the area. Furthermore, there are no privately-owned receivers in the vicinity of D8 and D14. Whilst these sites do not represent residence(s) on privately-owned land, they will continue to be monitored in accordance with the *MPO Air Quality and Greenhouse Gas Management Plan* (MACH Energy, 2019).

Field notes from the August sampling event noted that all the gauges contained insects, four (4) contained vegetation and six (6) contained bird droppings. Field notes indicated that gauge D7b contents were brown/green in colour, turbid and contained bird droppings resulting in the gauge being deemed to be contaminated. The insoluble solids result for site D7b was not included in the annual average calculation. All other August 2023 insoluble solid results were included in the annual rolling average calculations. **Figure 4-1** compares the

monthly insoluble solids results to the annual averages for each dust gauge and the assessment criterion.

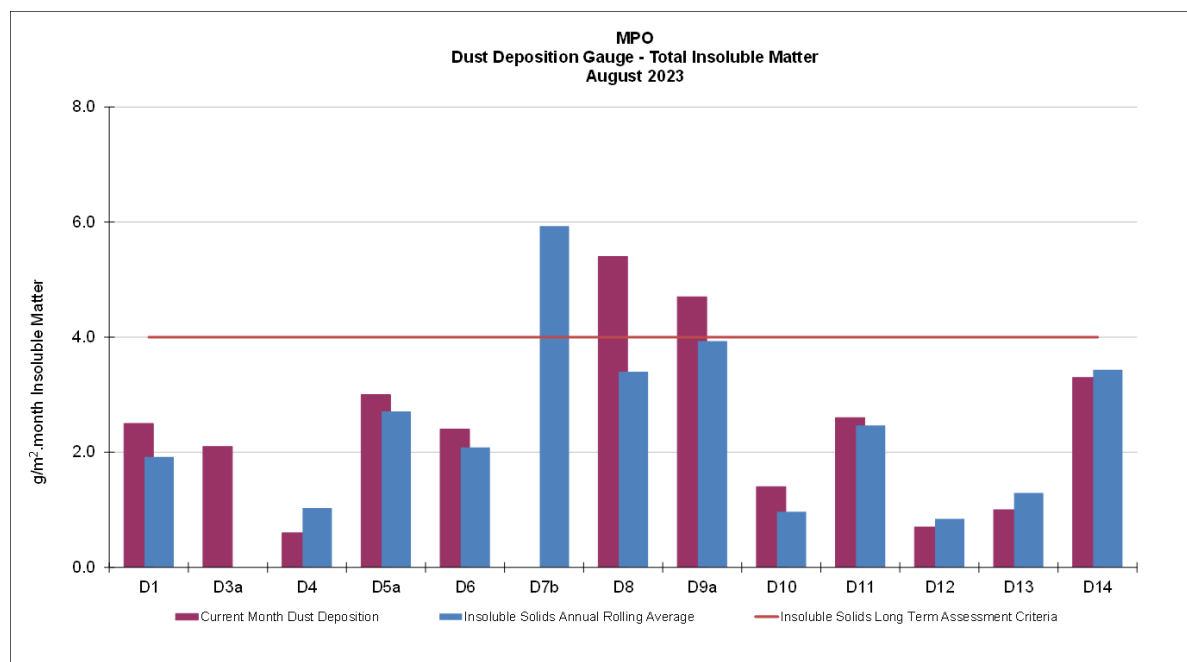


Figure 4-1: MPO Dust Deposition Monthly Results and Annual Rolling Average - August 2023

5. Total Suspended Particulates

All High-Volume Air Samplers (HVAS) are run for 24 hours every six days in accordance with *AM-15 of Approved Methods for the Sampling and Analysis of Air Pollutants in New South Wales* (DECC, 2007), referencing *AS/NZS 3580.9.3:2015 Methods for sampling and analysis of ambient air – Determination of suspended particulate matter – Total suspended particulate matter (TSP) - High volume sampler gravimetric method*, for the monitoring of TSP.

Three TSP HVAS units are included in the MPO air quality monitoring network and are displayed in **Table 5-1** below. These units were commissioned in March 2017.

Table 5-1 Total Suspended Particulate Monitoring Sites

ID	Description
A-PF2	Reilly's
M-WS4	Kayuga Road Met Station
A-PF5	Athlone

5.1 Assessment Criteria

TSP is assessed against the guidelines defined in the *EPA Approved Methods for the Modelling and Assessment of Air Pollutants in New South Wales* (EPA 2016) and Project Approval DA 92/97. The DA 92/97 specifies an annual average project contribution plus background criterion of 90 µg/m³.

5.2 Results

Sample collection was undertaken by AECOM with sample analysis performed by ALS, a NATA accredited laboratory. TSP results for the monitoring period are provided in **Table 5-2**. Annual rolling averages for August 2023 have been provided as an indication of performance between August 2022 – August 2023 and do not represent annual average results for 2023 as per Schedule 3, Condition 20 of DA 92/97.

Table 5-2 Total Suspended Particulate Monitoring Data – August 2023

Run Date	Assessment Criterion	TSP $\mu\text{g}/\text{m}^3$		
		HVAS A-PF2	HVAS A-PF5	HVAS M-WS4
4/07/2023	-	70.7	105	63.8
10/07/2023	-	68.4	75.3	42.2
16/07/2023	-	20.7	25.1	38.5
22/07/2023	-	38.2	4.8	5.1
28/07/2023	-	38.2	76.2	38.1
Monthly Mean	-	47.2	57.3	37.5
Annual Rolling Average	90	54	45	35

Notes:

Results in **bold** indicate an elevated reading

5.3 Discussion

For the reporting period, the annual rolling average TSP data at all sites was below the annual average criterion of $90 \mu\text{g}/\text{m}^3$.

6. Real Time Air Quality Monitoring

Continuous particulate matter less than $10 \mu\text{m}$ (PM_{10}) and particulate matter less than $2.5 \mu\text{m}$ ($\text{PM}_{2.5}$) monitoring was conducted by three Palas Fidas units (one utilised for management only) at MPO during August 2023.

The EPA identification numbers 1 and 2 refer to Palas Fidas units installed on Wybong Road (A-PF2) and Dorset Road (A-PF5), respectively. In addition, a third unit (A-PF4) is installed on Kayuga Road with data used for management purposes only.

Real time PM_{10} and $\text{PM}_{2.5}$ 12-month rolling averages for August 2023 have been provided in Section 6.2 and 6.4 respectively, as an indication of performance during 2023 as per Schedule 3, Condition 20 of DA 92/97.

6.1 PM_{10} Results – 24 Hour Rolling Average

In accordance with the DA 92/97 limit of $50 \mu\text{g}/\text{m}^3$ for the 24-hour rolling average, there were two (2) elevated readings in August 2023. Real time PM_{10} 24 hour rolling average results for August 2023 are presented in **Table 6-1**.

Table 6-1: MPO Palas Fidas PM₁₀ Data – August 2023

Date	A-PF2/EPA ID 1	A-PF4	A-PF5/EPA ID 2	Muswellbrook NW	Muswellbrook NW 24 Hour Average Limit (µg/m³)	A-PF2, A-PF4, A-PF5 24 Hour Average Limit (µg/m³)
	24-hour Average Result					
1/08/2023	16	11	-	19.5	44	50
2/08/2023	19	17	-	23	44	50
3/08/2023	30	22	-	25.3	44	50
4/08/2023	22	17	-	21.4	44	50
5/08/2023	24	29	-	24.4	44	50
6/08/2023	19	17	-	24	44	50
7/08/2023	20	17	-	15	44	50
8/08/2023	16	15	-	13.3	44	50
9/08/2023	19	16	-	17.3	44	50
10/08/2023	31	13	-	25.5	44	50
11/08/2023	28	18	-	30.3	44	50
12/08/2023	43	13	-	53.4	44	50
13/08/2023	29	24	-	34.8	44	50
14/08/2023	15	12	-	13.6	44	50
15/08/2023	9	16	-	9	44	50
16/08/2023	11	13	-	10.4	44	50
17/08/2023	18	12	-	15	44	50
18/08/2023	10	8	-	11.2	44	50
19/08/2023	11	7	-	11.7	44	50
20/08/2023	8	5	-	8	44	50
21/08/2023	10	7	-	10.4	44	50
22/08/2023	13	11	-	13	44	50
23/08/2023	15	9	-	16.7	44	50
24/08/2023	12	15	-	14.5	44	50
25/08/2023	17	16	-	18.5	44	50
26/08/2023	15	17	-	19.5	44	50
27/08/2023	62	19	-	16.1	44	50
28/08/2023	17	19	-	16	44	50
29/08/2023	22	24	-	24.3	44	50
30/08/2023	23	13	-	25.9	44	50
31/08/2023	39	14	-	11.5	44	50

Notes:

Results in bold indicate elevated readings during adverse weather conditions.

Results with "-" indicate dates where data was affected by maintenance or servicing (scheduled and unscheduled)

Figure 6-1 below shows the results of real-time PM₁₀ 24 hour rolling average results at MPO air quality monitoring sites August 2023.

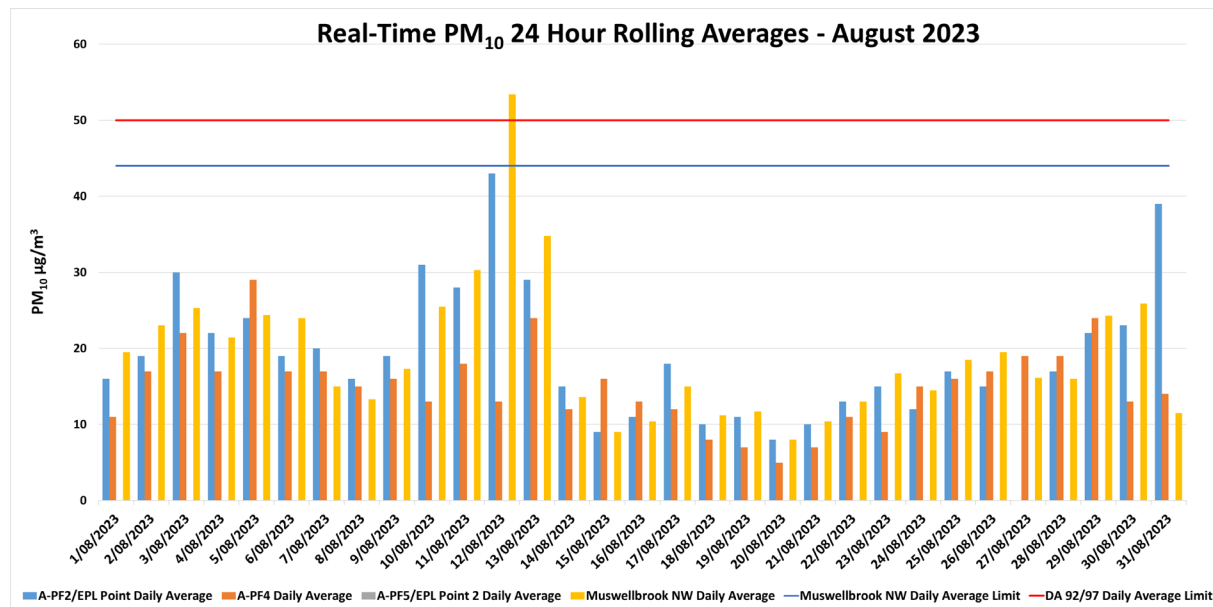


Figure 6-1: Real-time PM₁₀ 24 Rolling Average Results for August 2023.

6.2 PM₁₀ Results – Annual Rolling Average

There was no exceedance of the PM₁₀ annual rolling average reported at MPO during August 2023. Real time PM₁₀ annual rolling averages during the reporting period are presented in **Figure 6-2** below.

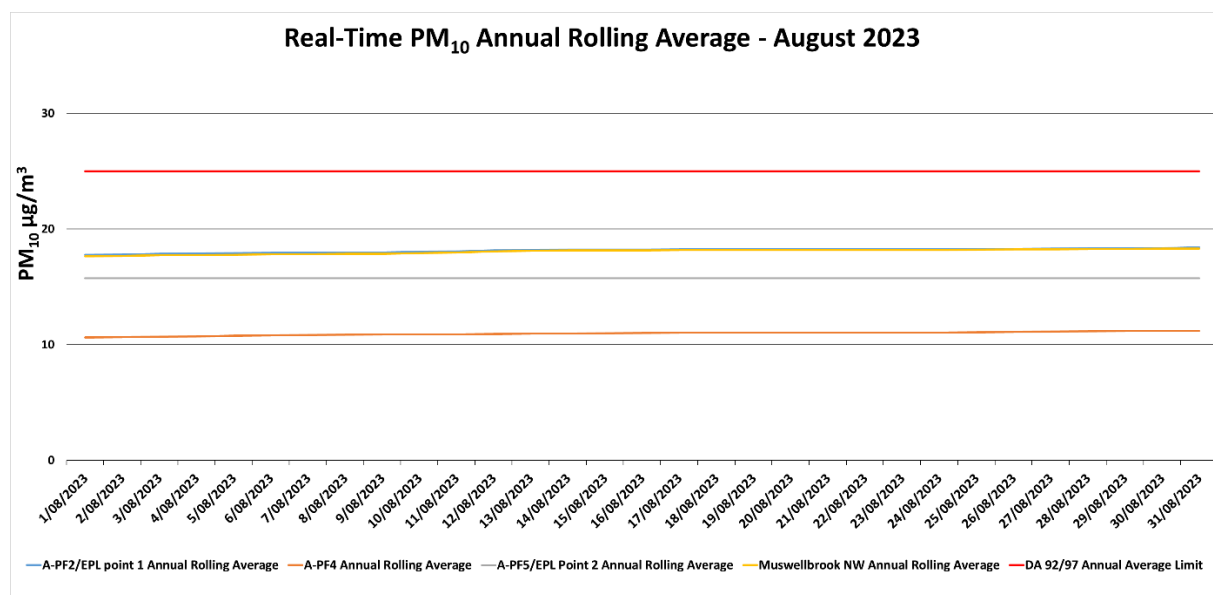


Figure 6-2: Real-time PM₁₀ Annual Rolling Average Results for August 2023.

6.3 PM_{2.5} Results – 24 Hour Rolling Average

There was no exceedance of the PM_{2.5} annual rolling average reported at MPO during August 2023. Real time PM_{2.5} 24 hour rolling average results for August 2023 are presented in **Table 6-2**.

Table 6-2: MPO Palas Fidas PM_{2.5} Data – August 2023

Date	A-PF2/EPA ID 1	A-PF4	A-PF5/EPA ID 2	A-PF2, A-PF4, A-PF5 24 Hour Average Limit (µg/m³)
	24-hour Average Result			
1/08/2023	4	4	-	25
2/08/2023	6	6	-	25
3/08/2023	7	8	-	25
4/08/2023	7	8	-	25
5/08/2023	7	7	-	25
6/08/2023	6	7	-	25
7/08/2023	6	7	-	25
8/08/2023	6	6	-	25
9/08/2023	5	5	-	25
10/08/2023	6	5	-	25
11/08/2023	6	5	-	25
12/08/2023	8	6	-	25
13/08/2023	7	7	-	25
14/08/2023	7	6	-	25
15/08/2023	4	7	-	25
16/08/2023	5	6	-	25
17/08/2023	5	5	-	25
18/08/2023	4	4	-	25
19/08/2023	4	3	-	25
20/08/2023	3	3	-	25
21/08/2023	4	3	-	25
22/08/2023	5	5	-	25
23/08/2023	4	3	-	25
24/08/2023	5	6	-	25
25/08/2023	6	6	-	25
26/08/2023	6	7	-	25
27/08/2023	10	9	-	25
28/08/2023	7	8	-	25
29/08/2023	8	10	-	25
30/08/2023	7	6	-	25
31/08/2023	7	6	-	25

Notes:

Results in **bold** indicate elevated readings during adverse weather conditions.

Results with “-” indicate dates where data was affected by maintenance or servicing (scheduled and unscheduled)

Real time PM_{2.5} 24-hour average results for August 2023 are presented in **Figure 6-3** below.

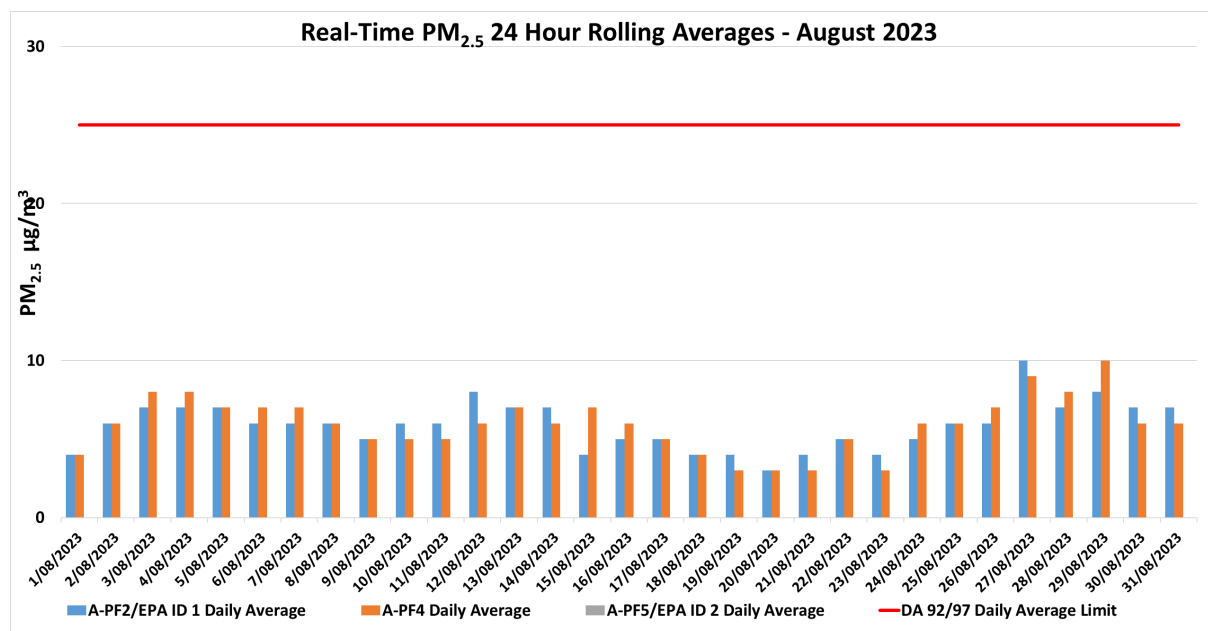


Figure 6-3: Real-time PM_{2.5} 24 hour Rolling Average Results for August 2023.

6.4 PM_{2.5} Results - Annual Rolling Average

There was no exceedance of the PM_{2.5} annual rolling average reported at MPO during August 2023. Real time PM_{2.5} annual rolling averages during the reporting period are presented in **Figure 6-4** below.

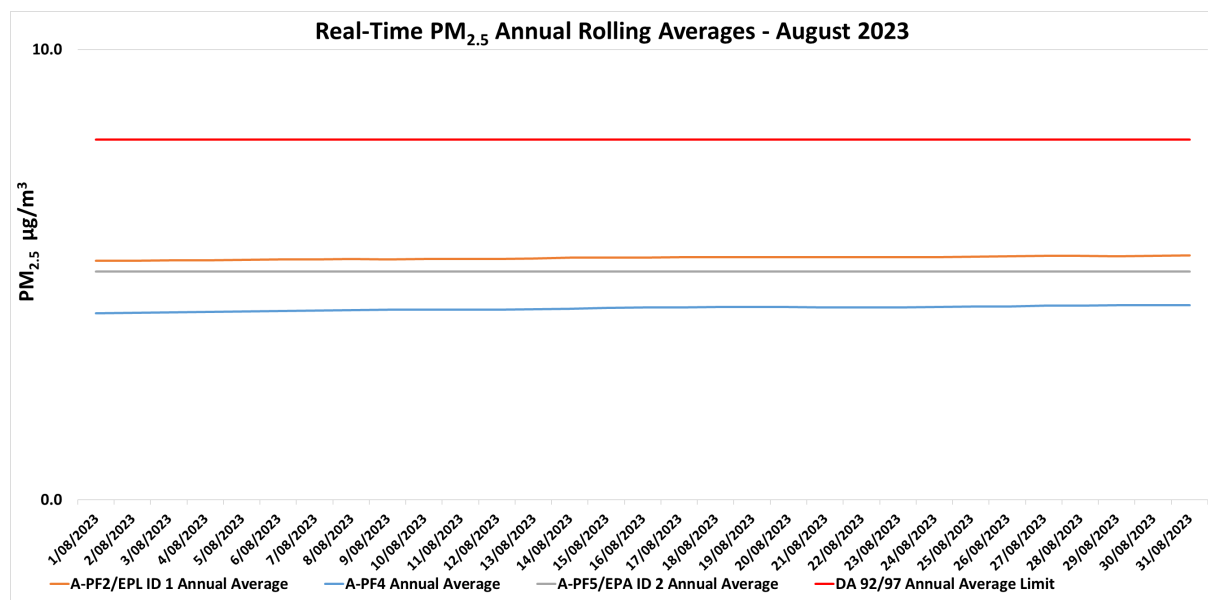


Figure 6-4: Real-time PM_{2.5} Annual Rolling Average Results for August 2023.

7. Surface Water Monitoring

7.1 Methodology

Surface water quality is monitored at 14 sites on a monthly basis, with additional monitoring conducted if triggered by a rain event. A more comprehensive suite of analysis is performed at these sites on a quarterly basis.

7.2 Assessment Criteria

Surface waters were assessed as per the [MPO Water Management Plan](#) (MACH Energy, 2022) in accordance with site specific trigger values that have been developed using the [ANZECC](#) (2000) guidelines for sites that contain a minimum of two years of monthly data. Sites with insufficient data are assessed on default trigger values adopted from ANZECC (2000) guidelines.

7.3 Results

Surface water event monitoring was conducted by AECOM on 18 August 2023. Laboratory analysis was performed by ALS NATA accredited laboratory. Monthly monitoring results for pH, EC, TSS and Total Dissolved Solids (TDS) are presented in **Table 7-1**.

Table 7-1 – MPO Monthly Surface Water Monitoring Results – 18 August 2023

Station	pH	Electrical Conductivity (EC) (µs/cm) ¹	Total Dissolved Solids (TDS) (mg/L)	Total Suspended Solids (TSS) (mg/L)
W1	8.1	490	304	12
W2	8.1	580	354	10
W3	8.1	700	432	21
W4	7.9	2400	1560	38
W5	*	*	*	*
W6A	8.3	600	356	11
W9	*	*	*	*
W11	8.3	3350	1890	14
W12	8.2	4800	2620	6
W13	8.7	4250	2470	13
W14	*	*	*	*
W15	8.2	790	474	12
W16	8.3	7350	4640	38
W17	8.1	1000	614	26

Note: Results in **bold** indicate elevated reading of adopted assessment criteria.

*Dry or insufficient water to sample.

[^] Unsafe access

¹ Results have been rounded in accordance with the In-house method Q4AN(EV)-332-WI2 (EC).

During the 18 August monitoring event, three (3) sites were dry or contained insufficient water to sample. Sites W2, W6A and W17 exceeded there respective EC trigger limits. All sites were within there respective pH and TSS trigger levels.

An investigation is triggered if elevated measurements occur for three consecutive sampling events in accordance MPO Water Management Plan (MACH Energy, 2022).

8. Groundwater Monitoring

Quarterly groundwater monitoring was completed on 9, 10 and 17 August 2023. Water level results for the groundwater bores are presented in **Table 8-1**. The quarterly pH and EC results are presented in **Table 8-2** and **Table 8-3**, respectively.

Table 8-1 - MPO Quarterly Groundwater Water Level Results

Monitoring Location/ ID	Water Level Trigger Range		Aug 2023 Water Level (DTW)	May 2023 Water Level (DTW)	Feb 2023 Water Level (DTW)	Triggered (Yes/No)
	80 th Percentile (DTW)	Trigger				
3500C500L	-	>± 0.5m	24.23	22.81	17.13	
3500C500S	-	>± 0.5m	24.80	23.42	19.86	
4500F000	-	>± 0.5m	22.14	22.45	22.73	
5000D000	-	>± 0.5m	125.84	123.75	120.72	
5000D000-R**	-	>± 0.5m	138.08	137.96	137.38	
5500D000	-	>± 0.5m	39.51	38.85	37.18	
6500F500L	-	>± 0.5m	53.13	52.97	52.78	
6500F500M	-	>± 0.5m	53.48	53.32	52.98	
6500F500U	-	>± 0.5m	30.27	30.29	30.32	
6500F625	-	>± 0.5m	14.61	14.43	13.34	
Melody	-	>± 0.5m	12.70	11.97	10.83	
7500F000	-	>± 0.5m	35.57	35.44	35.34	
WRA1L	-	>± 0.5m	1.89	0.93	0.00	
WRA1U	-	>± 0.5m	*	5.47	3.47	
WRA6L	-	>± 0.5m	1.11	1.10	1.10	
WRA6U	-	>± 0.5m	2.17	1.98	1.83	
MPBH1	9.71	10.70	10.09	10.25	9.96	No
MPBH1-C	-	>± 0.5m	10.21	10.25	10.06	
MPBH1-HR	-	>± 0.5m	36.09	26.13	29.61	
MPBH2	12.20	14.20	11.34	11.28	10.85	No
MPBH2-C	-	>± 0.5m	11.62	11.45	11.12	
MPBH2-HR	-	>± 0.5m	11.58	11.33	11.07	
MPBH3b	12.00	Dry (or 14.0m)	11.96	11.71	11.21	No
MPBH4	-	>± 0.5m	11.88	11.73	11.26	
MPBH4-C	-	>± 0.5m	11.45	11.20	10.74	
MPBH4-HR	-	>± 0.5m	50.98	50.55	50.54	
MPBH5	-	>± 0.5m	*	*	*	
MPBH5-C	-	>± 0.5m	11.88	10.55	10.34	
MPBH5-HR	-	>± 0.5m	11.02	10.79	10.43	
MPBH6	-	>± 0.5m	9.84	9.73	9.30	
MPBH6-C	-	>± 0.5m	11.88	11.73	11.26	

Monitoring Location/ ID	Water Level Trigger Range		Aug 2023 Water Level (DTW)	May 2023 Water Level (DTW)	Feb 2023 Water Level (DTW)	Triggered (Yes/No)
	80 th Percentile (DTW)	Trigger				
MPBH6-HR	-	>± 0.5m	11.02	11.96	10.62	
MPBH7	-	>± 0.5m	6.02	5.84	5.14	
MPBH7-C	-	>± 0.5m	17.40	15.51	13.15	

* Dry/insufficient water to sample

Table 8-2 - MPO Quarterly Groundwater pH Results

Monitoring Location/ ID	pH Trigger Range		Aug 2023 pH	May 2023 pH	Feb 2023 pH	Triggered (Yes/No)
	Lower	Upper				
3500C500L	6.0	8.5	7.6	7.6	7.6	No
3500C500S			6.9	7.0	7.3	No
4500F000			6.8	6.8	6.9	No
5000D000-R			7.6	7.6	7.7	No
5500D000			6.9	7.0	7.1	No
6500F500L			7.2	7.2	7.3	No
6500F500M			7.2	**	7.5	No
6500F500U			6.7	6.8	6.9	No
6500F625			7.0	7.0	7.2	No
Melody			7.0	7.0	7.2	No
7500F000			7.8	7.9	7.7	No
WRA1L			7.2	7.2	7.1	No
WRA1U			*	7.2	7.2	No
WRA6L			7.0	7.0	6.9	No
WRA6U			6.8	6.9	6.9	No
MPBH1			6.9	6.9	6.9	No
MPBH1-C			8.8	8.2	8.7	No
MPBH1-HR			7.8	8.0	7.7	No
MPBH2			6.9	6.8	6.8	No
MPBH2-C			11.1	7.2	11.3	No
MPBH2-HR			8.2	8.2	8.1	No
MPBH3b			7.2	8.0	7.5	No
MPBH4			7.0	7.0	7.0	No
MPBH4-C			7.7	7.8	8.0	No
MPBH4-HR			7.3	7.4	7.3	No
MPBH5			*	*	*	-
MPBH5-C			9.6	9.7	9.6	Yes
MPBH5-HR			7.6	7.4	7.5	No
MPBH6			7.1	7.1	7.1	No
MPBH6-C			7.3	7.8	7.8	No
MPBH6-HR			7.3	7.3	7.1	No
MPBH7			7.0	7.1	6.8	No
MPBH7-C			7.2	7.2	7.4	No

* Dry/insufficient water to sample

** Blocked

- Trigger Levels are not applicable due to non-alluvial bore

Table 8-3 - MPO Quarterly Groundwater EC Results

Monitoring Location/ ID	Maximum Beneficial Use Trigger	Aug 2023 EC ¹	May 2023 EC ¹	Feb 2023 EC ¹	Triggered (Yes/No)
3500C500L	7800	3750	3700	4100	No
3500C500S	7800	10000	5850	4200	No
4500F000	22000	8650	8700	8600	No
5000D000-R	-	4300	4300	4450	
5500D000	7800	4450	4450	4500	No
6500F500L	7800	2950	2950	3000	No
6500F500M	7800	3150	**	3400	No
6500F500U	7800	5450	5550	5350	
6500F625	7800	3950	3700	3450	No
Melody	-	4800	3800	2900	
7500F000	7800	6300	5950	6350	No
WRA1L	7800	3000	3050	3250	No
WRA1U	-	*	7850	3600	
WRA6L	7800	5900	6750	6000	No
WRA6U	22000	8150	8050	8050	No
MPBH1	800	690	690	700	No
MPBH1-C	-	1550	1000	1550	
MPBH1-HR	-	800	1450	1800	
MPBH2	930	1150	1150	1050	Yes
MPBH2-C	-	1750	1100	1850	
MPBH2-HR	-	1500	1500	1700	
MPBH3b	7800	7000	4650	5700	No
MPBH4	-	5350	5450	5750	
MPBH4-C	-	4900	4350	4550	
MPBH4-HR	-	5450	5400	5600	
MPBH5	-	*	*	*	
MPBH5-C	-	720	750	720	
MPBH5-HR	-	840	780	900	
MPBH6	-	1000	1050	1300	
MPBH6-C	-	3200	6250	7100	
MPBH6-HR	-	3600	5250	1800	
MPBH7	-	10100	10400	11000	
MPBH7-C	-	10300	9950	10800	

* Dry/insufficient water to sample

** Blocked

- Indicates no trigger limit identified

1 Results have been rounded in accordance with the In-house method Q4AN(EV)-332-WI2 (EC).

During August 2023 monitoring event, sites WRA1U and MPBH5 contained insufficient water to sample and ten (10) sites had changes in standing water level of greater than $\pm 0.5\text{m}$ from the previous measurement. All monitoring locations were within the pH trigger limits except sites MPBU1-C, MPBH2-C and MPBH5-C. All monitoring locations were below their respective EC trigger limits except site 3500C500S and MPBH2.

An investigation is triggered if elevated measurements occur for three consecutive sampling events in accordance MPO Water Management Plan (MACH Energy, 2022). The next quarterly monitoring event is scheduled for November 2023.

9. Noise Monitoring

Attended noise monitoring was undertaken during the night period of 29/30 August 2023 at six (6) monitoring locations as per the [MPO Noise Management Plan](#) (MACH Energy, 2021) in accordance with DA 92/97 and EPL 20850.

9.1 Results

The results for nighttime attended noise monitoring for noise generated by MPO in August 2023 against noise criteria is shown in **Table 9-1**; **Table 9-2**; and **Table 9-3**.

Table 9-1 – $L_{A1,1min}$ Generated by MPO: Attended Night Monitoring – 29/30 August 2023

Location	Start Date and Time	Wind Speed m/s	Stability Class	Criterion dB	Criterion Applies ¹	MPO Only $L_{A1,1min}$ dB ^{2,4}	Exceedance dB ³
N-AT1	30/08/2023 00:53	0.9	E	45	Yes	IA	No
N-AT2	29/08/2023 22:31	2.7	E	45	Yes	IA	No
N-AT3	29/08/2023 23:04	3.1	E	45	Yes	IA	No
N-AT4	29/08/2023 23:31	0.5	E	45	Yes	IA	No
N-AT5	29/08/2023 23:55	0.7	E	45	Yes	IA	No
N-AT6	30/08/2023 00:28	0.8	D	45	Yes	IA	No

Notes:

- As per Condition L2.3 of EPL 20850, noise emission limits do not apply during wind speeds greater than 3m/s at 10m above ground level, or stability category F temperature inversion conditions and wind speeds greater than 2m/s at 10m above ground level, or stability category G temperature inversion conditions.
- Estimated or measured $L_{A1,1minute}$ attributed to MPO.
- NA in exceedance column means meteorological conditions outside those specified in Condition L2.3 of EPL 20850 and thus criterion is not applicable.
- IA = inaudible; and
- Bold results indicate exceedance of criteria.
- Monitoring at N-AT5 was unable to be conducted due to a road closure.

Table 9-2 – $L_{Aeq,15min}$ Generated by MPO: Attended Night Monitoring – 29/30 August 2023

Location	Start Date and Time	Wind Speed m/s	Stability Class	Criterion dB	Criterion Applies ¹	MPO Only L_{Aeq} dB ^{2,3}	Exceedance dB
N-AT1	30/08/2023 00:53	0.9	E	43	Yes	IA	No
N-AT2	29/08/2023 22:31	2.7	E	36	Yes	IA	No
N-AT3	29/08/2023 23:04	3.1	E	41	Yes	IA	No
N-AT4	29/08/2023 23:31	0.5	E	42	Yes	IA	No
N-AT5	29/08/2023 23:55	0.7	E	40	Yes	IA	No
N-AT6	30/08/2023 00:28	0.8	D	35	Yes	IA	No

Notes:

- As per Condition L2.3 of EPL 20850, noise emission limits do not apply during wind speeds greater than 3m/s at 10m above ground level, or stability category F temperature inversion conditions and wind speeds greater than 2m/s at 10m above ground level, or stability category G temperature inversion conditions.
- Estimated or measured $L_{Aeq, 15minute}$ attributed to MPO.
- IA = inaudible; and
- Bold results indicate exceedance of criteria.
- Monitoring at N-AT5 was unable to be conducted due to a road closure.

Table 9-3 – $L_{Aeq, period}$ Cumulative Noise: Attended Night Monitoring – 29/30 August 2023

Location	Start Date and Time	Cumulative Noise Criterion L_{Aeq} dB	Measured Mining Only $L_{Aeq, period}$ dB ^{1,2,3}	Exceedance dB
N-AT1	30/08/2023 00:53	40	41	Yes
N-AT2	29/08/2023 22:31	40	IA	No
N-AT3	29/08/2023 23:04	40	IA	No
N-AT4	29/08/2023 23:31	40	IA	No
N-AT5	29/08/2023 23:55	40	IA	No
N-AT6	30/08/2023 00:28	40	29	No

Notes:

- These are the results for MPO and all other mining sources. 15-minute measurements have been assumed to apply across the entire night period as a conservative measure and to represent "worst case" results; and
- By definition, cumulative noise refers to two or more noise sources. If only one other source of mining is audible, or if MPO is inaudible, the measured cumulative noise defined here is 'Nil'.
- NA in exceedance column means criterion was not applicable due to atmospheric conditions.
- Monitoring at N-AT5 was unable to be conducted due to a road closure.

The purpose of the noise monitoring is to quantify and describe the existing acoustic environment around the mining operation and compare results with relevant limits as per the *MPO Noise Management Plan* (MACH Energy, 2021).

Table 9-3 shows an exceedance of the cumulative noise criteria at N-AT1, however the MPO contribution to total mine noise at all receiver locations was inaudible and below the applicable intrusive and sleep disturbance noise criterion.

10. Blast Monitoring

There were 8 blast events during August (a total of 51 blasts YTD). Results for August 2023 are presented in **Table 10-1**. All blast results during this monitoring period were below the criteria stated in Schedule 3, Condition 10 of DA 92/97 and L5 of EPL 20850.

Table 10-1 – MPO Blast Monitoring Results - August 2023

Day & Date Fired	Time Fired	Vibration (mm/s) BVOC	Overpressure (dBL) BVOC	Vibration (mm/s) BVO2	Overpressure (dBL) BVO2	Blast Fume Compliant
2/08/2023	13:01	0.300	104.2	0.380	93.3	Y
8/08/2023	13:00	0.010	90.7	0.010	85.1	Y
9/08/2023	15:03	0.950	98.6	0.530	101	Y
17/08/2023	11:19	0.270	94.5	0.300	98.5	Y
22/08/2023	13:14	0.180	104.5	0.210	101.2	Y
24/08/2023	11:12	0.480	100.4	0.270	97.1	Y
25/08/2023	10:00	0.620	91.8	0.410	97.4	Y
30/08/2023	15:05	0.690	95.8	0.950	99	Y

END OF REPORT